



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.


DWN No.: C-10101041567

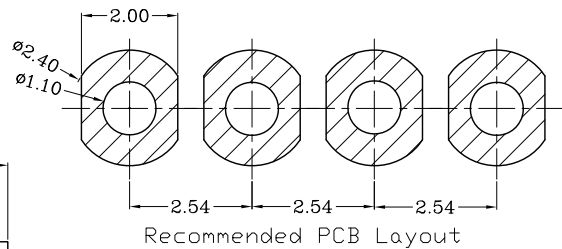

proposal

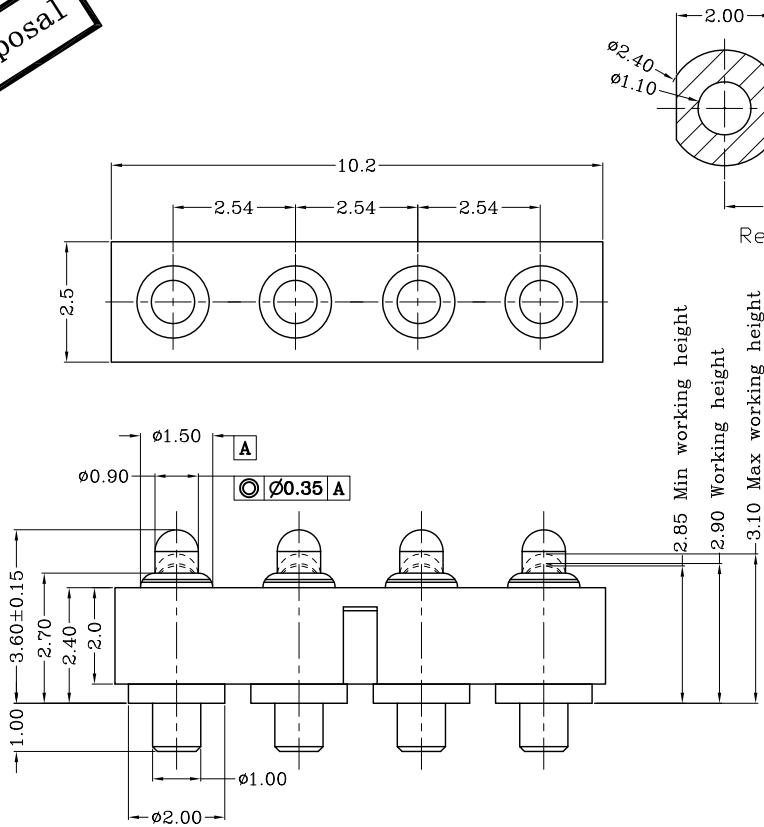

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	4	Leaded Brass	Au 0.1um plating Ni 1.4um
3	Plunger	4	Leaded Brass	Au 0.4um plating Ni 1.4um
4	Spring	4	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

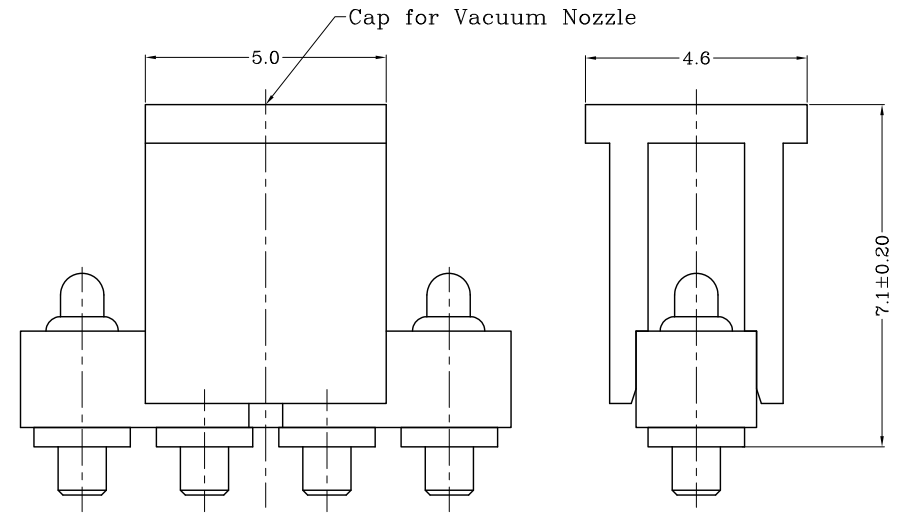

- Notes:
- Dimensions shall be interpreted per ASME Y14.5M.
 - Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning: Working height are not permitted to be less than Min working height.
 - Electrical performance
 - Resistance: 30mOhm Max.
 - Current rating: 2.0A
 - Packaging specification conforms to EIA 481
 - RoHS compliant.

Working height	2.90mm	50±15gf <2.1>
Durability	10000cycle	

10101041567
PART NUMBER

DIST

DIST

1	NEW	2016/01/27
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type Customer drawing	Unit mm	Weight _____
TOLERANCES UNLESS OTHER SPECIFIED 0. = ± 0.0 = ±0.15 0.00 = ±0.10 0.000 = ±		DWN: Caiwanlu	APVD:	
Angle: ± SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.		CHK:	REL:	
Name Pogo pin connector				
Scale 1:1	Size A4	DWG No. C-10101041567	Page 1/1	Rev. 1