



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWN No.: C-100070

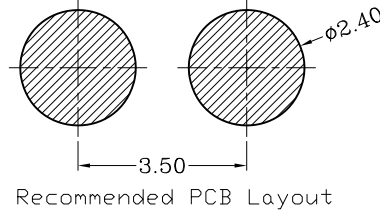

proposal

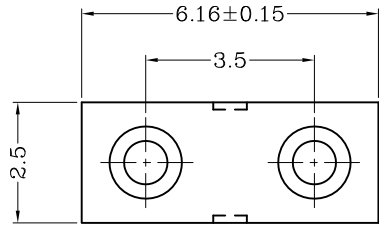

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

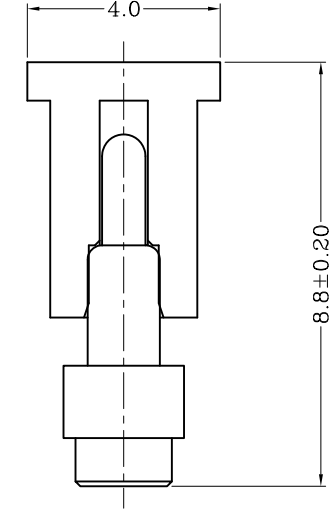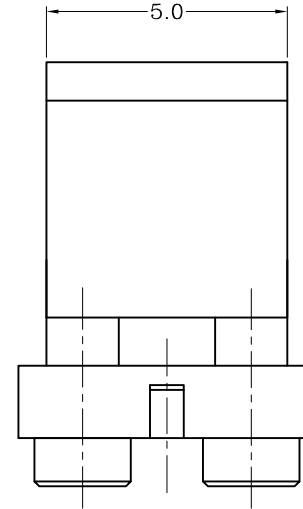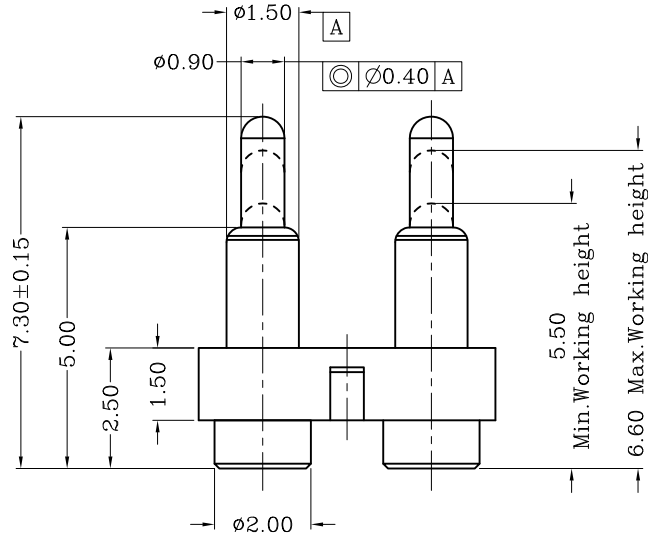

Notes:

- Dimensions shall be interpreted per ASME Y14.5M.
- Mechanical performance(See the table 1)
 $\langle 2.1 \rangle$ The force is the average of forces obtained when plunger goes downwards and upwards.
 $\langle 2.2 \rangle$ Warning: Working height are not permitted to be less than Min working height.
- Electrical performance
 Resistance: 30mOhm Max.
 Current rating: 2.0A
- Packaging specification conforms to EIA 481
- RoHS compliant.

Max.working height	6.50mm	90±30gf $\langle 2.1 \rangle$
Min.working height	5.50mm	190±35gf
Durability	10000cycle	

100070-2
PART NUMBER

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	_____
TOLERANCES UNLESS OTHER SPECIFIED 0. = ± 0.0 = ±0.15 0.00 = ±0.10 0.000 = ±		DWN:	Caiwanlu	APVD:		Top-Link Electronics Ltd.	
Angle: ± SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.		CHK:		REL:			
Name Pogo pin connector							
Scale	1:1	Size	A4	DWG No.	C-100070	Page	1/1
						Rev.	C1

C1	Replace the drawing frame	2015/09/17
C	ADD CAP-003	2007/06/04
Rev.	Revision record.	Date.

DIST

DIST
