
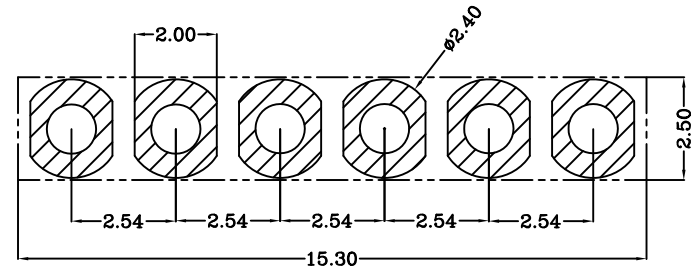
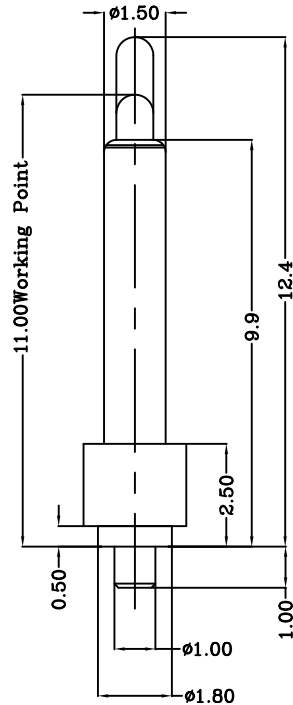
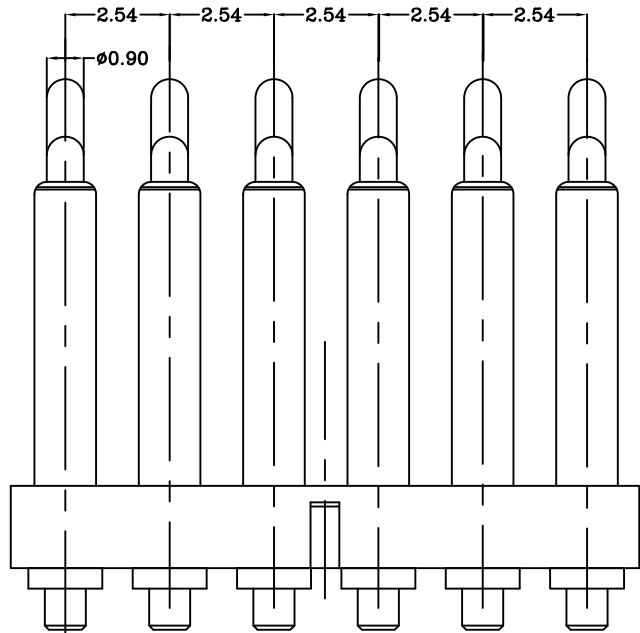


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWG NO.

C-110408

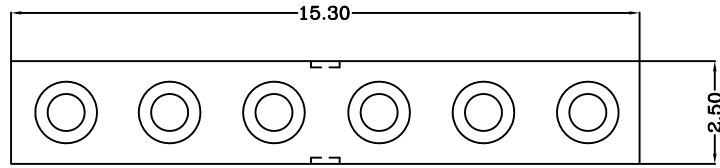

Recommended PCB Layout

USED ON -

- Notes:
 1 Material, Housing: PA 4.6 (30% Glass Filled)
 Color Black.
 Contact: Brass
 2 Mechanical demands:
 Plating Plunger: Min 0.4um Au over 1.4um Ni
 Plating Body: Min 0.1um Au over 1.4um Ni.

110408-6
 PART NUMBER

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL		HT TR -		FIN - ✓	
0	= ±-	DWN	Qin	APVD	Lansing	Top-Link Electronics Ltd.	
0.0	= ±0.15	CHK	Jim	REL			
0.00	= ±0.10	NAME BATTERY POGO CONNECTOR 6 POSITIONS					
0.000	= ±	PGC-1.5-12.4-R-6P-2.54PH					
ANGLE: ±1°		SCALE	A4	DWG NO.	C-110408	SHEET	REV
SURF TEXTURE: 3.2/√		1:1				1 OF 1	B
REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT							

LDC	-
DIST	-

	NEW		08 / 10 / 16
LTR	REVISION RECORD	APVD	DATE